

## MICR (E-13B) Font Solution

# Installation & Test Guide

For HP LaserJets & MFPs with 100 Pin DIMM

# TYPEHAUS

Extending the Resources and Abilities of Your Printer

### Congratulations!

You are now ready to print MICR using your printer. To test your MICR Font Solution, simply use your printer's control panel to print a PCL Font List. On most printers, select "Information" and then "Print PCL Font List".

See the reverse side of this sheet for an example of the first page of a PCL Font List showing the MICR Font Solution font. The PCL Font List may vary a little between different printer models, but the MICR font will be shown somewhere in the list.

### PCL5 Font Selection

`Ec(0QEc(s0p8h8.4v0s0b0T`

### Character Mapping

MICR	Char	Dec	Hex
0	0	48	30
1	1	49	31
2	2	50	32
3	3	51	33
4	4	52	34
5	5	53	35
6	6	54	36
7	7	55	37
8	8	56	38
9	9	57	39
A	A	65	41
B	B	66	42
C	C	67	43
D	D	68	44


TypeHaus Reorder Part Number: 11B582-36

Solutions  
Business Partner




TypeHaus, Inc.  
655 Second Street  
Encinitas, CA 92024  
760.334.3555  
www.typehaus.com

© 2010 TypeHaus, Inc. All rights reserved. (2158-100812A)

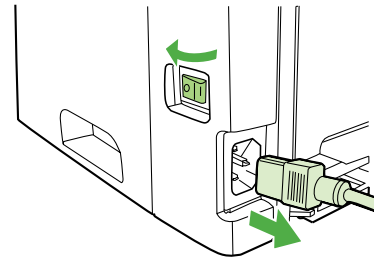


1

Use the power switch to turn off the printer and then unplug the power cord from the printer.



2

Unplug all remaining cables and cords from the printer.





3

Carefully open the DIMM access door located on the left side of the printer.


4

Remove the DIMM from the anti-static bag it came in, grasping the DIMM along the top edge away from the gold contacts.

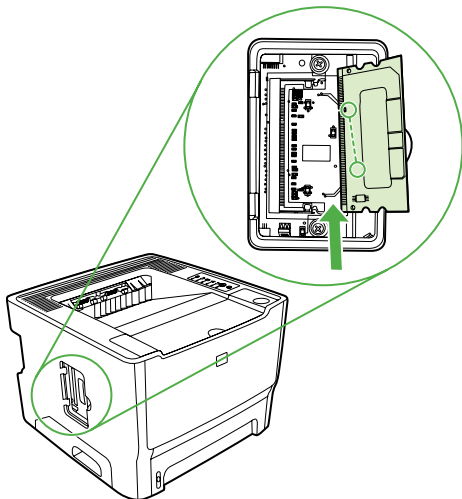


5

The DIMM has a notch cut in the edge between some of the gold contacts. Orient the DIMM so this notch aligns with the bump in the printer's connector and insert the DIMM into the connector.

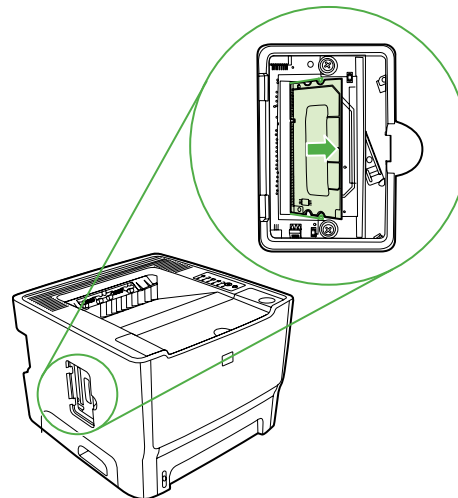

6

Press the DIMM body in until the metal retaining pins click.



7

Close the DIMM access door, reconnect all cables and cords, then turn the power switch on.

# HP LaserJet Printers PCL Font List



## USB STORAGE Resident Fonts

Font	Pitch/Point	Escape Sequence	Font #	Font ID
ABCDEFGHIJj i ç ³ ´ ¶ ¹ » ½ Á # \$	10.00/10.0	<esc>(00<esc>(s0p10.00h10.0v0s0b104t	USB1 1	
OCRA				
TH MICR 0Q	8.00/8.4	<esc>(00<esc>(s0p8.00h8.4v0s0b0T	USB1 2	
TH MICR 0Q 600	8.00/8.4	<esc>(00<esc>(s0p8.00h8.4v0s0b0T	USB1 3	
ABCDEFGHIJj i ç ³ ´ ¶ ¹ » ½ Á # \$	10.00/10.0	<esc>(10<esc>(s0p10.00h10.0v0s0b104T	USB1 4	
OCRB				
TH MICR 600	8.00/8.0	<esc>(8M<esc>(s0p8.00h8.0v0s0b80T	USB1 5	
TH MICR	8.00/10.0	<esc>(8M<esc>(s0p8.00h10.0v0s0b100T	USB1 6	
TH MICR 600 Ent	8.05/10.0	<esc>(8M<esc>(s0p8.05h10.0v0s0b100T	USB1 7	
TH MICR 600 Ent2	8.00/10.0	<esc>(8M<esc>(s0p8.00h10.0v0s0b100T	USB1 8	
TH MICR-600 100	8.00/12.0	<esc>(100<esc>(s0p8.00h12.0v0s0b360T	USB1 9	
© Copyright 2010. All rights Reserved.	0.46/20.0	<esc>(32Q<esc>(s0p0.46h20.0v0s0b24T	USB1 10	

## TYPEHAUS

## Internal Scalable and Bitmapped Fonts

Font	Pitch/Point	Escape Sequence	Font #	Font ID
Courier	Scalable	<esc>( [ ] <esc>(s0p [ ] h0s0b4099T	INTERNAL 0	
CG Times	Scalable	<esc>( [ ] <esc>(s1p [ ] v0s0b4101T	INTERNAL 1	
<b>CG Times Bold</b>	Scalable	<esc>( [ ] <esc>(s1p [ ] v0s3b4101T	INTERNAL 2	
<i>CG Times Italic</i>	Scalable	<esc>( [ ] <esc>(s1p [ ] v1s0b4101T	INTERNAL 3	
<b><i>CG Times Bold Italic</i></b>	Scalable	<esc>( [ ] <esc>(s1p [ ] v1s3b4101T	INTERNAL 4	
CG Omega	Scalable	<esc>( [ ] <esc>(s1p [ ] v0s0b4113T	INTERNAL 5	
<b>CG Omega Bold</b>	Scalable	<esc>( [ ] <esc>(s1p [ ] v0s3b4113T	INTERNAL 6	
<i>CG Omega Italic</i>	Scalable	<esc>( [ ] <esc>(s1p [ ] v1s0b4113T	INTERNAL 7	
<b><i>CG Omega Bold Italic</i></b>	Scalable	<esc>( [ ] <esc>(s1p [ ] v1s3b4113T	INTERNAL 8	
<i>Coronet</i>	Scalable	<esc>( [ ] <esc>(s1p [ ] v1s0b4116T	INTERNAL 9	
<b>Clarendon Condensed</b>	Scalable	<esc>( [ ] <esc>(s1p [ ] v4s3b4140T	INTERNAL 10	
Univers Medium	Scalable	<esc>( [ ] <esc>(s1p [ ] v0s0b4148T	INTERNAL 11	
<b>Univers Bold</b>	Scalable	<esc>( [ ] <esc>(s1p [ ] v0s3b4148T	INTERNAL 12	
<i>Univers Medium Italic</i>	Scalable	<esc>( [ ] <esc>(s1p [ ] v1s0b4148T	INTERNAL 13	

[ ] Pitch: 0.10 - 576 [ ] Symbol set [ ] Point size: 0.25 - 999.75  
See your Printer User's Manual for more information.